



ADVANCE FLASHING BEACON SIGNAL HEAD MOUNTING DETAILS

NOTES:


1. LOCK NIPPLE, 1 $\frac{1}{2}$ " x 1 $\frac{3}{4}$ ".
2. LOCK NUT, 1 $\frac{1}{2}$ ".
3. ORNAMENTAL CAP, LONG.
4. WASHER, STAINLESS STEEL BAND, 2 WRAPS.
5. CENTER HUB W/ COVER PLATE 4-WAY.
6. ELBOW, 90°, 1 $\frac{1}{2}$ " SERRATED.
7. ROUND POLE PLATE.
8. GALVANIZED PIPE 1 $\frac{1}{2}$ " x 12" THREADED BOTH ENDS.
9. 1 $\frac{1}{2}$ " PLAIN ELBOW.
10. $\frac{3}{4}$ " STAINLESS STEEL.
11. POLE SHAFT.
12. POSTMOUNT WITH TERMINAL COMPARTMENT.
13. 1 $\frac{1}{2}$ " PIPE, LENGTH VARIABLE, THREADED BOTH ENDS.
14. UNIVERSAL MOUNT STANDARD HARDWARE KIT.
15. STANDARD LOWER ARM
16. COVER
17. STANDARD UPPER ARM
18. UNIVERSAL BRACKET STANDARD ARM KIT
19. GUSSET TUBE.
20. UNIVERSAL BRACKET.

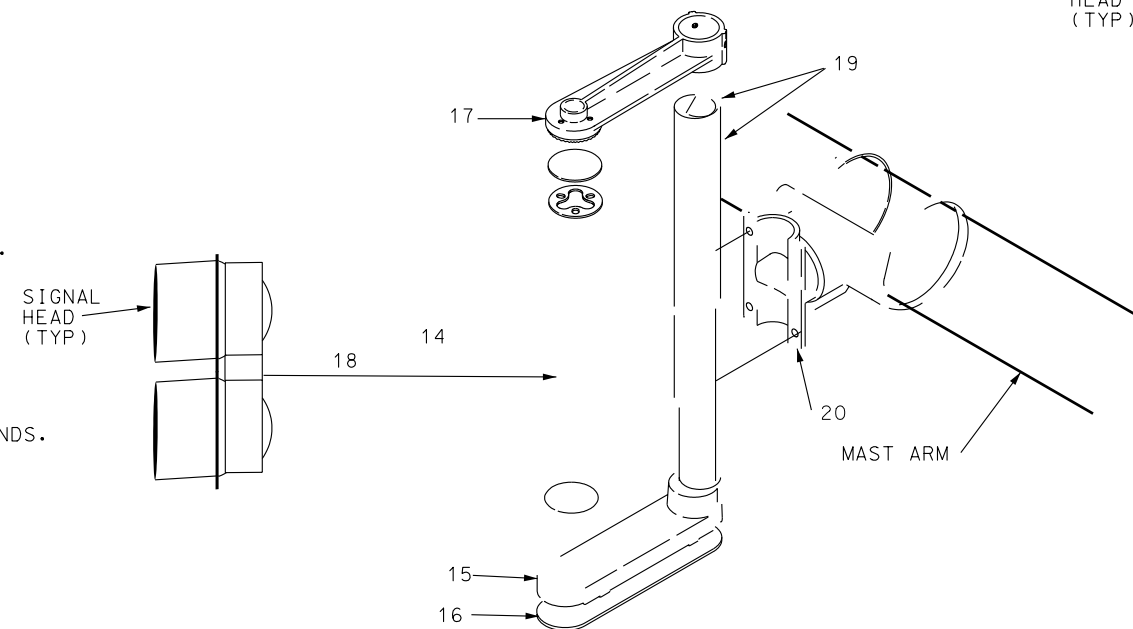

MASTARM SIGNAL HEAD MOUNTING DETAILS

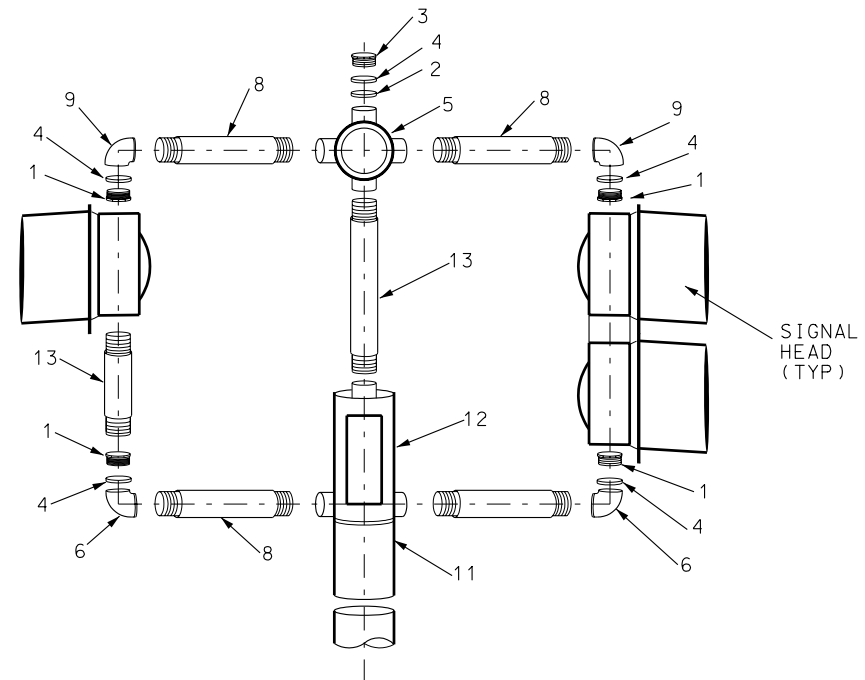

TOP SIGNAL HEAD MOUNTING DETAILS
WITH ENFORCEMENT INDICATION

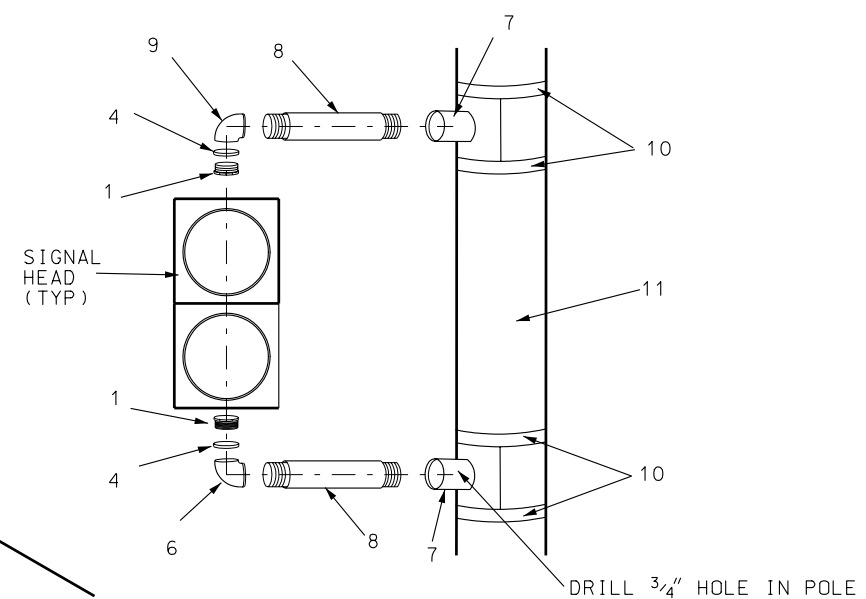

SIDE SIGNAL HEAD MOUNTING DETAILS

REVISIONS

UTAH DEPARTMENT OF TRANSPORTATION
STANDARD DRAWINGS FOR ROAD AND BRIDGE CONSTRUCTION
SALT LAKE CITY, UTAH

RECOMMENDED FOR APPROVAL
CHAIRMAN STANDARDS COMMITTEE
APPROVED
DEPUTY DIRECTOR

TYPICAL RAMP
METER SIGNAL
HEAD MOUNTING

STD DWG
AT 4

STANDARD DRAWING TITLE

NO. DATE APPR. REMARKS